

SEE YOUR HOME IN HD

Use Piper's 180-degree live video to take a look around when you're away. Check on the dog from the office, or have captured video sent to your phone when doors are opened or rooms are entered. It's not just about security. It's about being connected to what's important to you.

WORRY FREE SECURITY

Piper easily connects to your smartphone or tablet. Now, you can fit your entire home in your pocket. Set Piper to monitor activity while you're away and choose which notifications to receive, so you can enjoy peace of mind when you're not there.

PAINLESS HOME AUTOMATION

Just like your home, Piper is completely customizable. Add home automation accessories to Piper to control lights and appliances remotely, or set up an automated schedule to save yourself that extra trip home.



Camera

- Night vision
- HD resolution - 3.4MP CMOS sensor with 1.67MP streaming (1536 x 1088 pixels)
- 180° fisheye lens
- Electronic pan, tilt, zoom & quad-view

Audio


- Microphone
- Speaker
- Two-way audio
- 105dB siren

Sensors

- Motion
- Temperature
- Humidity
- Ambient light

What is Piper?

Piper lets you manage and connect with your home in an entirely new way. It's the perfect balance of security, video monitoring, and automation that will make life safer and more convenient for you and your family.

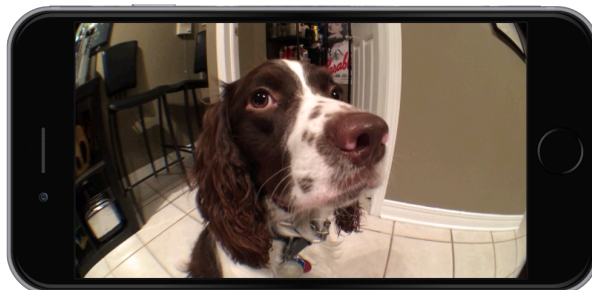

Dimensions

- With stand: 156mm x 83mm x 68mm (6.14" x 3.27" x 2.68")
- Without stand: 138mm x 83mm x 52mm (5.43" x 3.27" x 2.05")

Weight

- With stand: 400g (0.88lbs)
- Without stand: 295g (0.65lbs)

Package Contents

- Piper nv
- Power supply
- 3 x AA batteries
- Optional wall mount
- Quick start guide

Warranty and Return Policy

Available at

<http://getpiper.com/return-policy>

Standards

- Wi-Fi: IEEE® 802.11 b/g/n 2.4 GHz
Frequency range: 2400.0MHz – 2483.5MHz
Channels 1 – 13
17.9dBm Maximum output power
- Z-Wave® and Z-Wave Plus:
North America: 908.42MHz
Europe: 868.42MHz
Israel: 916.00MHz
Series 500 Controller
Maximum 232 devices
3.9dBm Maximum output power

Power

- DC power adapter (included)
Input: 100-240V AC 0.3A (Max)
Output: 5V DC 2.0A (Max)
Plug types:
Type A for North America
Type C and Type G (UK) for Europe
Type C for Israel
- Battery backup: 3xAA Alkaline batteries (included)

Minimum System Requirements

- Internet with Wi-Fi with upload bandwidth of 800kb/s
- Supported iPhone, iPad, iPod Touch (iOS 7.0+) or Android device (Android OS 2.3.3+)

Misc

- Indoor operation only
- Operating temperature: 5° to 35° Celsius
- App localizations available in English, French and Hebrew

Models

- North America: P01A015
- Europe: P01A015e
- Israel: P01A015-IL



icontrol
NETWORKS

Lighting and appliance control requires supported Z-Wave home automation devices.
Icontrol, Icontrol Networks, Powered by Icontrol and the Icontrol logos are trademarks of Icontrol Networks Inc. More information available at getpiper.com/legal

555 Twin Dolphin Drive
Redwood City, CA
94065
U.S.A.