


Energy monitoring up to 65A and switching control (on/off) 2x32A

SMART METER:




SWITCHING ON/OFF

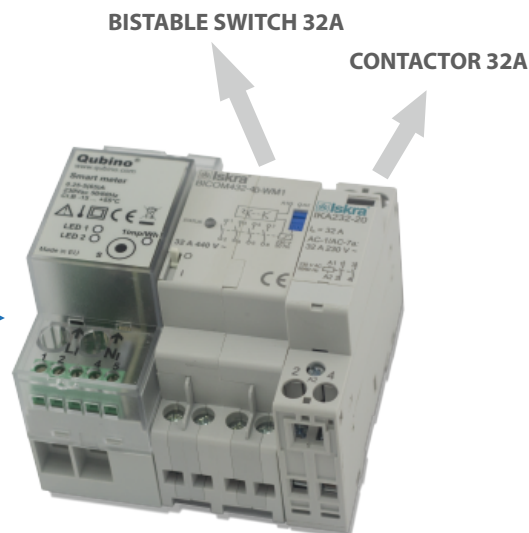

Smart meter: The first and only Z-Wave product worldwide for DIN rail installation

WIRING DIAGRAM

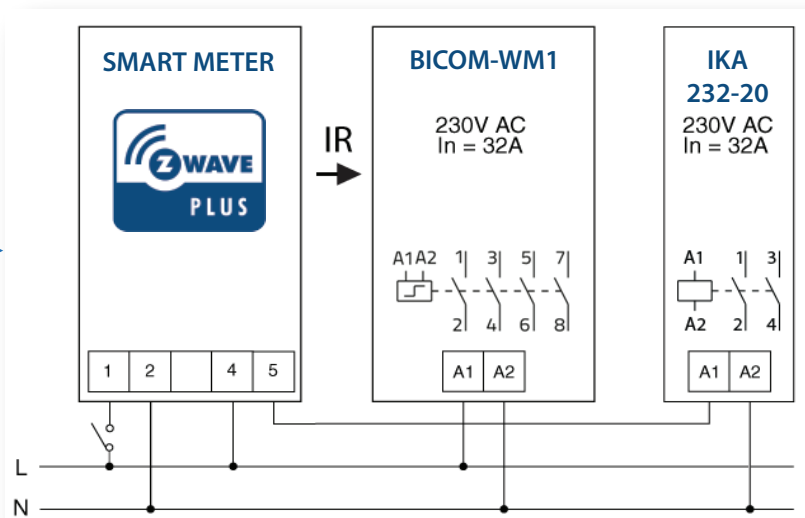

TECHNICAL SPECIFICATIONS

SMART METER



Voltage: 230V $\pm$ 20%, 50-60Hz
Energy monitoring up to 65A (single phase)
ZWAVE PLUS (868,42 MHz)

IKA232-20 - contactor



Voltage: 230V $\pm$ 10%, 50-60Hz
Current: 32A, 2 pole

BICOM-WM1 - bistable switch



Voltage: 230V $\pm$ 10%, 50-60Hz
Current: 32A, 4 pole